

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 March 2005 (03.03.2005)


PCT

(10) International Publication Number  
**WO 2005/019655 A3**

- (51) International Patent Classification<sup>7</sup>: **F04D 15/00**, 13/08
- (74) Agents: **BOTTI, Mario et al.**; Botti & Ferrari S.r.l., Via Locatelli, 5, I-20124 Milano (IT).
- (21) International Application Number:  
PCT/EP2004/009407
- (22) International Filing Date: 23 August 2004 (23.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
MI2003A001661 22 August 2003 (22.08.2003) IT
- (71) Applicant (for all designated States except US): **ASKOLL HOLDING S.R.L.** [IT/IT]; Via Industria, 30, I-36031 Povolario di Dueville (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MARIONI, Ello** [IT/IT]; Via Molino, 6, I-36031 Dueville (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: ELECTRONIC CONTROL DEVICE FOR A SYNCHRONOUS PUMP

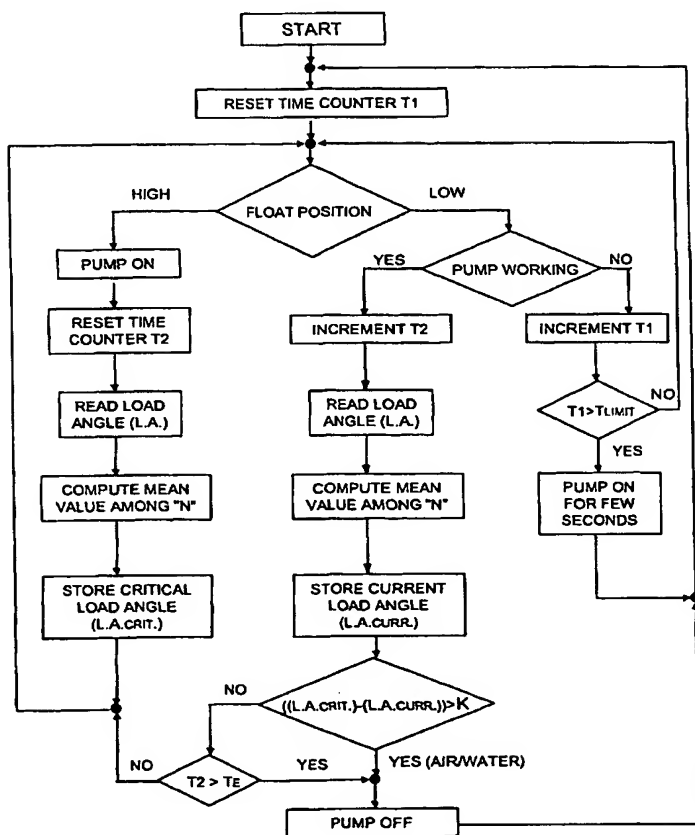

(57) Abstract: The invention relates to an electronic driving device (20) for turning on and off a synchronous pump, that is a pump (15) comprising a synchronous electric motor (1) with a permanent-magnet rotor (8), comprising: - at least a static power switch (17) inserted in series between the motor (1) and an AC electric power supply source (Vp); and - a processing unit (16) having at least an input receiving a synchronism signal (V) and a control output connected to said switch (17); characterised in that it is enabled by a signal emitted by a float level sensor (40) and includes an input receiving a signal (a) by a position sensor (21) detecting the rotor (8) polarity and position; the pump turn-on and off being regulated according to the signal emitted by said level sensor (40) and to a measured difference between a critical load angle (8) and a current load angle computed during different working conditions of the pump.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Date of publication of the amended claims: 13 October 2005

**Published:**

- with international search report
- with amended claims

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(88) Date of publication of the international search report:  
31 March 2005